

FORCES

RAIL FORCES	RAIL WEIGHT (LBS)	RAIL ASSEMBLY WEIGHT (LBS)
*R1	182	182
*R2	182	182
*R3	182	182
PIT FLOOR TO SUPPORT (LBS) (MINIMUMS IMPACT)		
2900 Kg (6400 LBS)		

CHARACTERISTICS


GENERAL

APPLIED CODE: _____
 CAPACITY: _____ (750, 1000 LBS)
 NOMINAL SPEED: _____ 40 FPM
 TRAVEL: _____
 PIT DEPTH: _____ (MIN. 6')
 CAR DETAILS
 CAB PANEL SELECTION: _____
 CEILING SELECTION: _____ (MATCH)
 CAB FLOORING: _____ (PLY, FINISH)
 FINISHED FLOOR THICKNESS: _____ (1/8 to 3/4)
 CAB HEIGHT: _____ (80, 96")
 CAB OPERATION: _____ (AUTO)
 GATE TYPE: _____ (FOLD, C/FOLD, C/B, BLK, SCZR)
 LLOCKS/CALL STATIONS/TRAVEL/DOORS (BY OTHERS)
 TRAVEL: _____
 ENTRANCE SIDE: _____
 DOOR SWING: _____
 LOCK TYPE: _____
 AUTO DOOR OP: _____


DRIVE UNIT

DRIVE ASSEMBLY MFR: _____
 MOTOR: _____
 MOTOR MODEL: _____
 MOTOR CONTROLLER: _____
 SUSPENSION
 TYPE: _____
 NOMINAL STRENGTH: _____
 ELECTRICAL
 POWER SUPPLY: _____ 60 Hz/1 Phase/230 volt

**2 MOUNTING POSITIONS
CENTER OR SIDE**

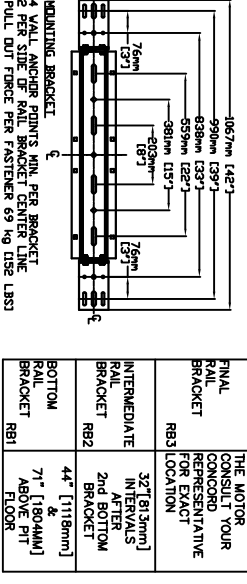

FINAL RAIL BRACKET	BELOW THE MOTOR CONSULT YOUR REPRESENTATIVE FOR LOCATION
INTERMEDIATE RAIL BRACKET	32\"/>
BOTTOM RAIL BRACKET	44\"/>

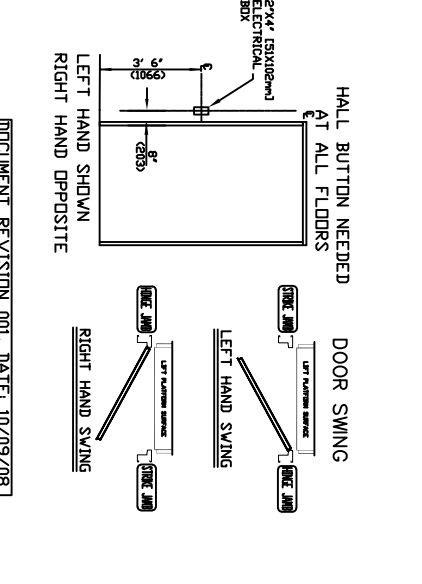

STANDARD OPTIONS PROVIDED:
 BUTTON MARKING: _____
 HALL CALL KEYS: _____
 MATCH CALL STATION: _____
 HALL CALL SHAPE: _____
 PRE-VE PACKAGE: _____
 CONTROLLER LOCATION: _____

LANDING 1	LANDING 2	LANDING 3	LANDING 4
PIT	SIDE A	SIDE A	SIDE A
ENTRANCE SIDE			
DOOR SWING			
LOCK TYPE			
AUTO DOOR OP			

DISCONNECT (2): NO
 BUFFER SPRING: NO
 TEMP. RUN BUTTON: NO
 EXTRA CABLE (GEMT) 10: _____
 WALL FASTENERS: _____ LAG

PROVISIONS BY OTHERS

*HOSTWAY, CONSTRUCTION SITE, CLEARANCE PROVISIONS BY OTHERS:
 1- THE HOSTWAY SHALL BE CONSTRUCTED TO WITHSTAND AN IMPACT LOAD OF 900 KG (2000 LBS). REF. CSA B44 SECTION 21.1 (GSE/ANST A17.1, SECTION 106.3) TO THE OPERATION OF THE ELEVATOR.
 2- THE HOSTWAY SHALL BE CONSTRUCTED TO WITHSTAND THE FULL WEIGHT OF THE ELEVATOR THROUGHOUT THE HOSTWAY. THE HOSTWAY FRAMING SHALL BE WELDED IN ALL LOCATIONS THROUGHOUT THE HOSTWAY.
 3- HOSTWAY MUST HAVE A MINIMUM 152 mm x 152 mm (6\"/>