

- NOTES:
- A) DRYWALL OR PARGING (BY OTHERS) AS REQ'D.
 - B) SEE DATASHEET OF THE INSTALLATION DRAWING FOR LANDING ENTRANCE SCHEDULE AND RUNNING CLEARANCE.
 - C) ALL INFORMATION IS SUBJECT TO CHANGE.

GENERAL INFORMATION:


- EACH LANDING ENTRANCE SHALL BE SUPPLIED AS A FINISHED ASSEMBLY WITH DOOR AND FRAME BLANKED, REINFORCED, DRILLED AND TAPPED FOR ALL COMPONENTS DETAILED, READY FOR INSTALLATION.
- FRAMES SHALL BE 16 GA., FULLY WELDED CONSTRUCTION WITH ALL WELDED JOINTS GROUND TO A SMOOTH, UNIFORM FINISH.
- DOORS SHALL BE 18 GA., 2" THICK, SWINGING, FLUSH, STEEL REINFORCED CONSTRUCTION COMPLETE WITH GLASS LITE(S) AS INDICATED.
- DOORS/FRAMES FABRICATED WITH GALVANNEALED PRODUCT A40 COATED WITH PRIMER PAINT WITH SOME FACTORY APPLIED TOUCH-UP. REFER TO OUR INSTRUCTIONS IN MANUAL 000919 TO PAINT OVER THE PRIMER.
- 15 HOURS UL/ULC LABELLED ENTRANCES PROVIDED AS INDICATED.
- AUTO DOOR: COMMANDER IS PROVIDED.

FRONT VIEW

DRY WALL

CONCRETE


ALTERNATE MOUNTING



RIGHT HAND SWING

PRODDOR 42"
AUTOMATIC RH

HORIZONTAL SECTION

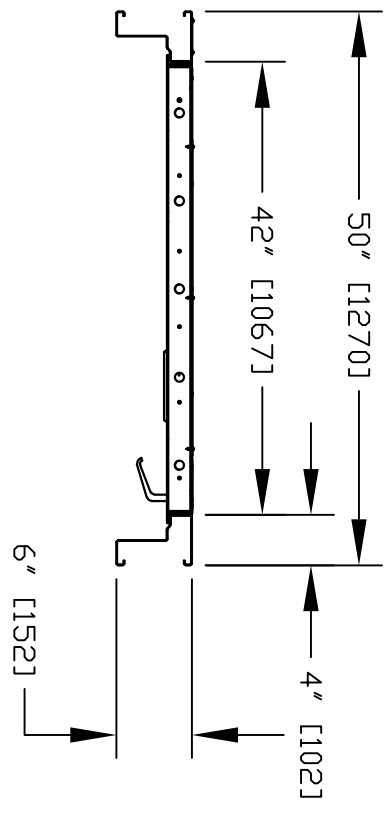

| | | |
|-----------|----------------|-------------|
| CUSTOMER: | DATE: | Part No. |
| PROJECT: | MM/DD/YY | Variant No. |
| ADDRESS: | REVISION DATE: | |
| | 10/12/22 | |
| | COMPLETED BY: | |
| | SYED | |
| | | JOB No. |
| | | JOB NUMBER |
| | | SHEET No. |
| | | 1 OF 1 |

