




ECLIPSE AUTO SLIM DOORS Model TYPE 1L-29 1/2"

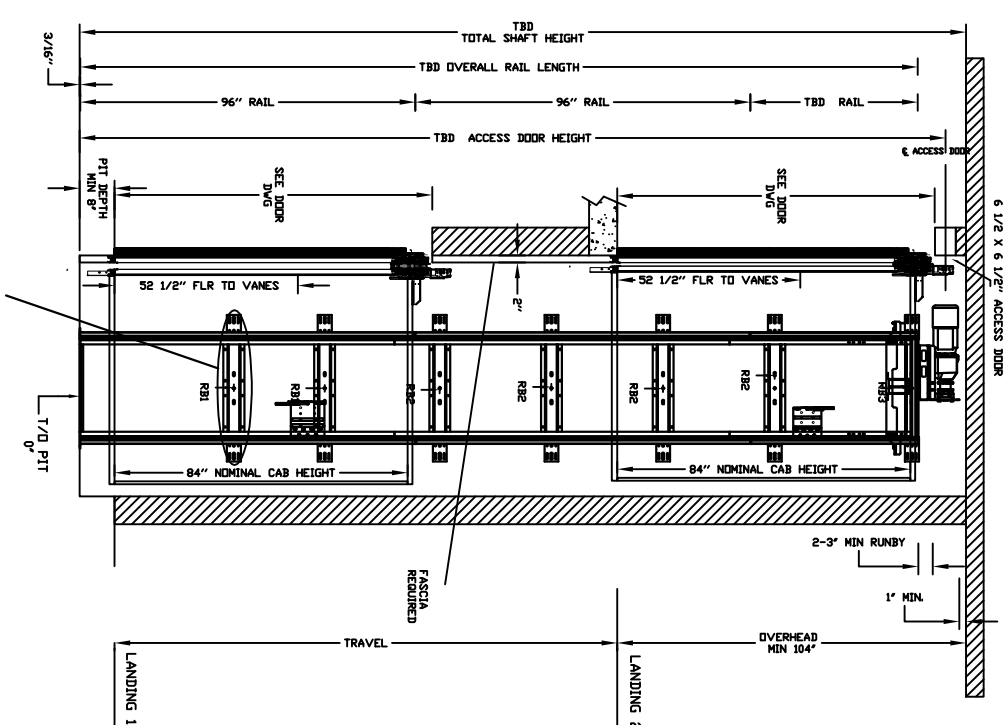

CANNOT HAVE HABITABLE SPACE BELOW PIT

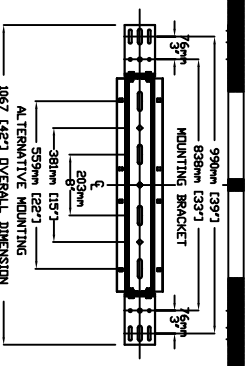


MOUNTING BRACKET
 4 WALL ANCHOR POINTS MIN PER BRACKET
 2 PER SIDE OF RAIL BRACKET CENTER LINE
 PULL OUT FORCE PER FASTENER 69 kg (152 LBS)

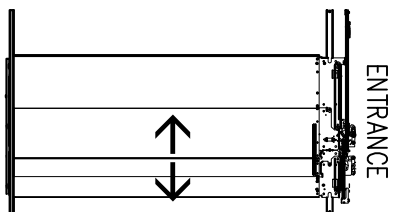

CHARACTERISTICS

- CAB DOOR TYPE: AUTO SLIM 2 SPEED DOORS
- ENTRANCE DOOR TYPE: AUTO SLIM 2 SPEED DOORS
- 2 SPEED DOORS FINISH: PAINT OR STAINLESS STEEL
- FULLY AUTOMATIC OPERATION TO OPEN THE DOORS UPON ARRIVAL AT THE LANDING
- LIGHTWEIGHT ALUMINUM SILL
- EMERGENCY BACK-UP BATTERY SYSTEM
- INFRARED DETECTION SYSTEM TO RETRACT DOORS BEFORE HITTING AN OBSTRUCTION

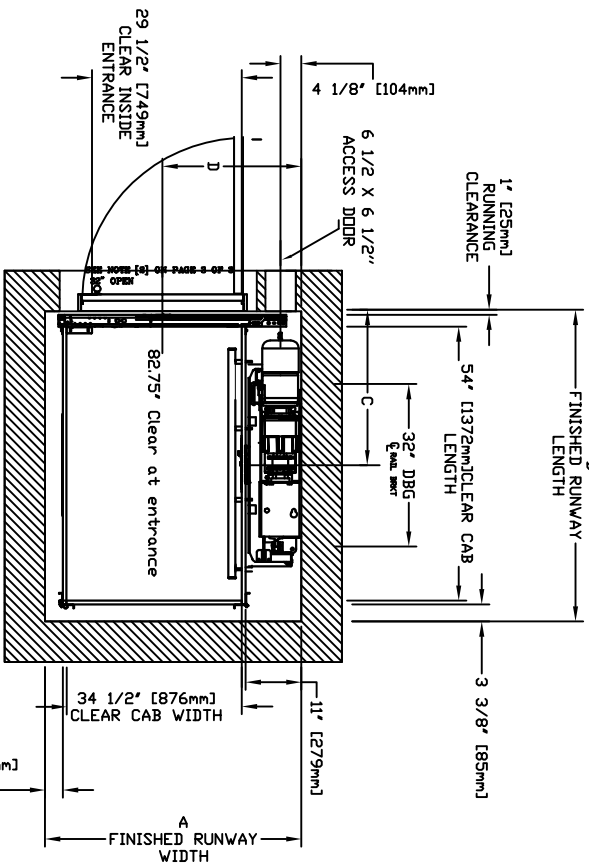


CLEAR INSIDE CAB WIDTH	CLEAR INSIDE CAB LENGTH	A		B		C		D
		FINISHED RUNWAY WIDTH	FINISHED RUNWAY LENGTH	FINISHED RUNWAY WIDTH	FINISHED RUNWAY LENGTH	RAIL CENTER LINE	DOOR CENTER LINE	
mm	mm	mm	mm	mm	mm	mm	mm	mm
876	1219	48	1283	50 1/2	1408	55 7/16	729	28 11/16
876	1372	54	1283	50 1/2	1561	61 7/16	779	30 11/16
876	1524	60	1283	50 1/2	1713	67 7/16	856	33 11/16

DOCUMENT REVISION 000, DATE: 03/01/17

RESIDENTIAL ELEVATOR

ECLIPSE SLIMS DOORS TYPE 1L-29 1/2"



RAIL FORCES	
* R1	* R2
1382 kg (3044 lb)	882 kg (1944 lb)
1542 kg (3400 lb)	1124 kg (2480 lb)
180 kg (400 lb)	112 kg (247 lb)
PIT FLOOR TO SUPPORT LOAD (INCLUDES IMPACT) 2909 kg (6400 lbs)	

FINAL RAIL BRACKET	FINAL RAIL BRACKET	FINAL RAIL BRACKET
RB3	RB2	RB1
BELOW THE MOTOR CONSULT YOUR REPRESENTATIVE FOR EXACT LOCATION	32" (813mm) INTERMEDIATE RAIL BRACKET AFTER 2nd BOTTOM BRACKET	39" (991mm) & 71" (1804mm) ABOVE PIT FLOOR

ALL INFORMATION IS SUBJECT TO CHANGE.
 PLEASE REFERENCE OUR ON-LINE DRAWINGS AT
www.savaria.com FOR THE MOST RECENT UPDATES

