




TOP RAIL BRACKET (3)	AT TOP OF HOISTWAY CONCORD REPRESENTATIVE LOCATION
INTERMEDIATE RAIL BRACKET (2)	48" INTERVALS ABOVE BOTTOM BRACKET
BOTTOM RAIL BRACKET (1)	24" ABOVE PIT FLOOR

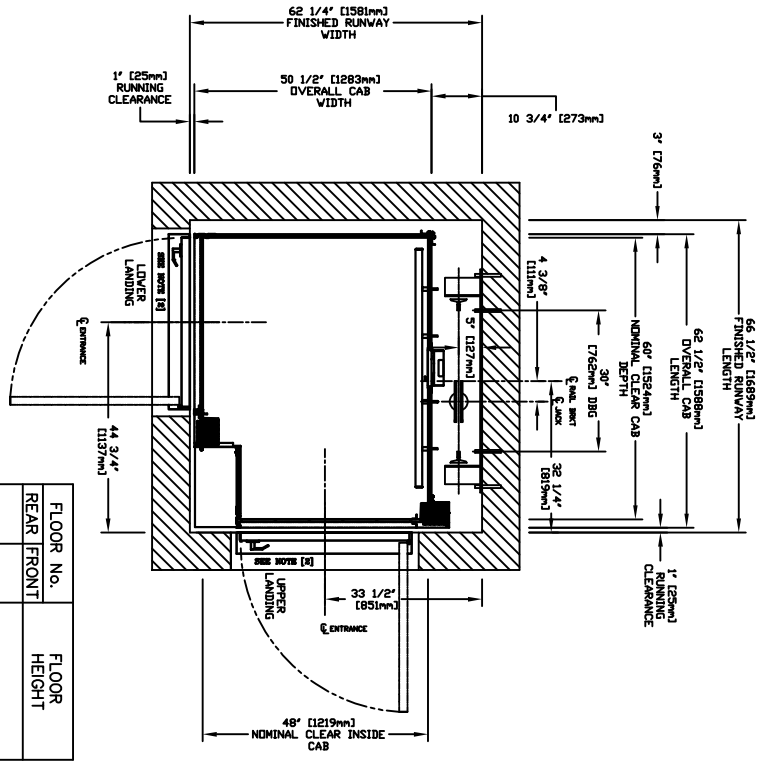



MAX. SPEED (ft./min)	MIN. PIT	TOTAL TRAVEL	MINIMUM OVERHEAD
30	12" ***		92" (2337)

*** NOTE: Additional pit equipment required when over 36" deep, consult your local dealer for details

FLOOR No.	FLOOR HEIGHT	TOTAL RISE
REAR FRONT		

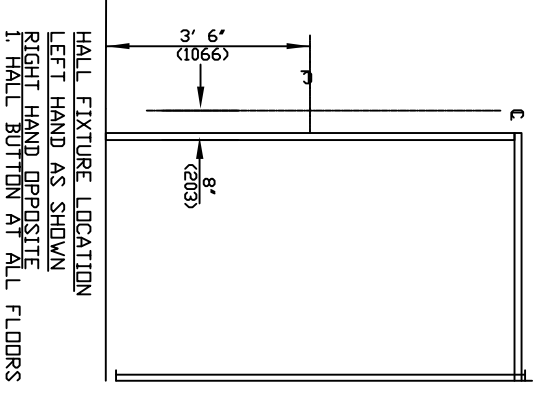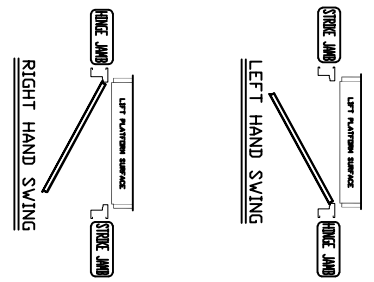

RAIL FORCES	R3 NOTE:
* R1	PIT FLOOR TO SUPPORT LOAD OF 82kips * (INCLUDES IMPACT)
* R2	FOR TOTAL PULL-OUT FORCE ON RAIL BRACKET, R1 MUST BE DOUBLED TO 844LBF.
4220Lbf.	FOR LOCAL APPLICATION OF PIT LOAD, SEE PIT CHANNEL/BUFFER SKETCH.
RAIL WEIGHT : 80 lbs / ft	

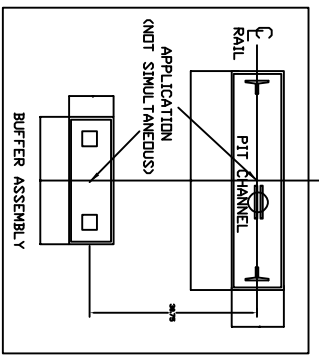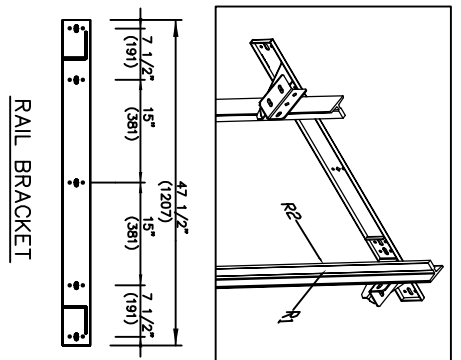

DOCUMENT REVISION #002, DATE: 01/10/18

RESIDENTIAL ELEVATOR
INFINITY HD MODEL 4860

CUSTOMER:	DATE:	
PROJECT:	DESIGN NAME:	
LOCATION:	COMPLETED BY:	SHEET NO.: