




TOP RAIL BRACKET ①	AT TOP OF HOISTWAY CONSULT YOUR CONCORD REPRESENTATIVE FOR EXACT LOCATION
INTERMEDIATE RAIL BRACKET ②	48" INTERVALS ABOVE BOTTOM BRACKET
BOTTOM RAIL BRACKET ③	24" ABOVE PIT FLOOR

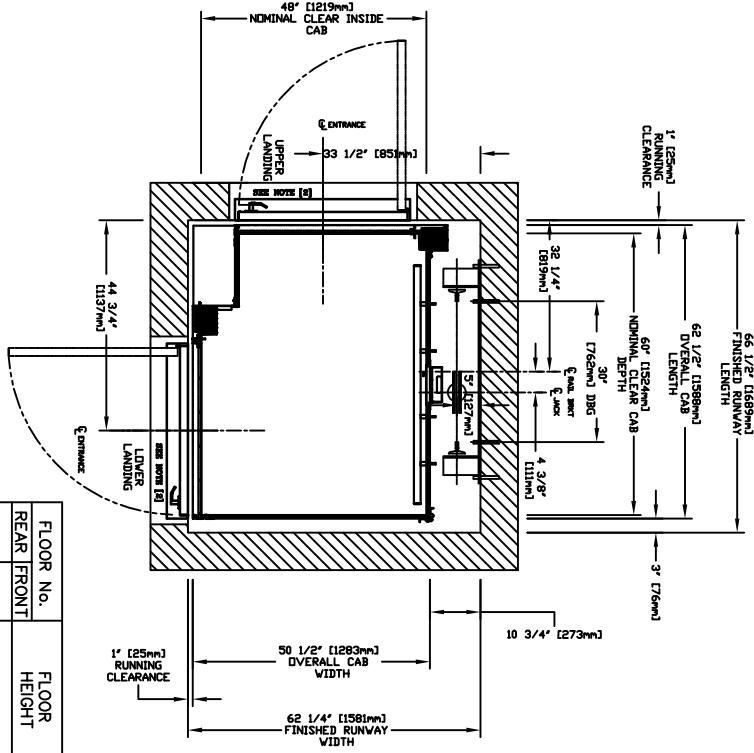



MAX. SPEED (ft/min)	MIN. PIT	TOTAL TRAVEL	MINIMUM OVERHEAD
30	12" ***		92" (2337)

*** NOTE: Additional pit equipment required when over 36" deep, consult your local dealer for details

FLOOR NO.	FLOOR HEIGHT
REAR FRONT	
TOTAL RISE	

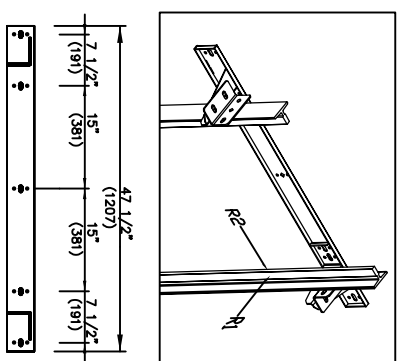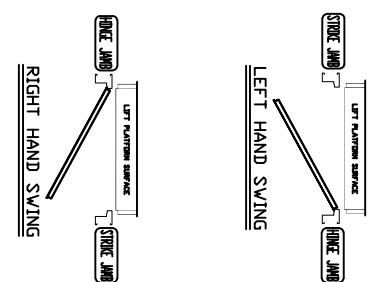

RAIL FORCES	R3 NOTE:
* R1	PIT FLOOR TO SUPPORT LOAD OF 822kips * (INCLUDES IMPACT)
* R2	FOR TOTAL PULL-OUT FORCE ON RAIL BRACKET, R1 MUST BE DOUBLED TO 844LBF.
422kips	FOR LOCAL APPLICATION OF PIT LOAD, RAIL WEIGHT = 80 lbs / ft

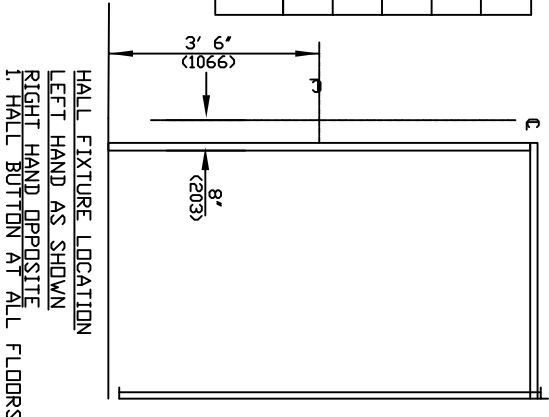

RESIDENTIAL ELEVATOR
INFINITY HD MODEL 4860

CUSTOMER: _____ DATE: _____
 PROJECT: _____ REVIEW DATE: _____
 LOCATION: _____ COMPLETED BY: _____
 JOB NO. **savaria** SHEET NO. _____

DOCUMENT REVISION #002, DATE: 01/10/18