

PROVISION BY OTHERS ALL DOORS



- DRYWALL OR PARKING AROUND DOOR
- FRAMES AROUND DOOR SHALL BE WOOD CONSTRUCTION WITH ALL EDGES AND JOINTS SANDED TO A SMOOTH, FINAL PAINT
- FINISH MOLDING AROUND DOOR FRAME
- SEE DATASHEET OF THE INSTALLATION DRAWING FOR LANDING ENTRANCE SCHEDULE

ADD. PROVISION FOR DOOR SLAB BY OTHERS

- DOOR SHALL BE SOLID-CORE, SWINGING TYPE
- 1.75" THICK, 36" x 80" DOOR SLAB
- DUMMY DOOR HANDLE

NOTE: ALL INFORMATION IS SUBJECT TO CHANGE.

DOOR PANEL TYPE

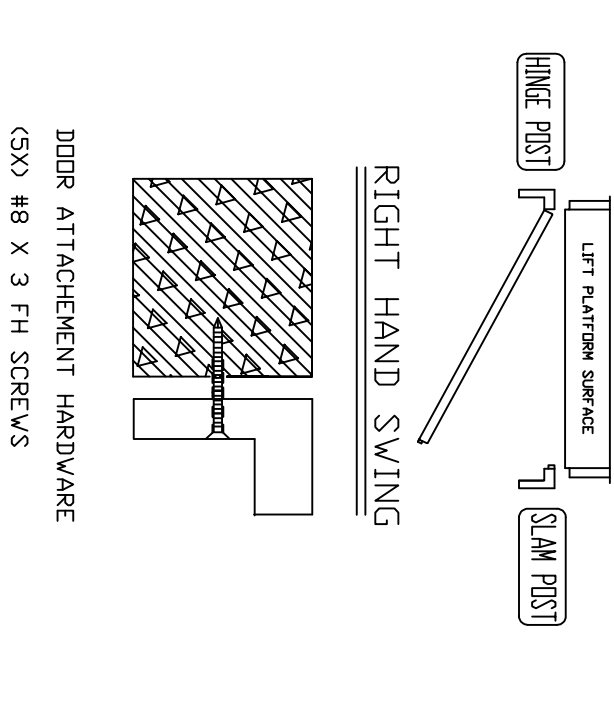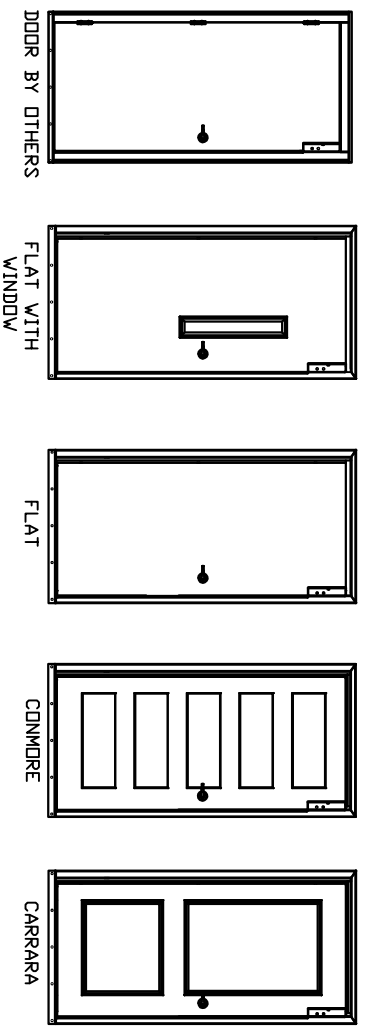

DOOR ATTACHMENT HARDWARE
(5X) #8 X 3 FH SCREWS

CUSTOMER: CARRARA

PROJECT: 36x80" MANUAL WOODEN RH DOOR

ADDRESS:

DATE: MM/DD/YY

REVISION DATE: MM/DD/YY

COMPLETED BY:

JOB No.: JOB NUMBER 1

SHEET No.: OF 1

Part No.:

Variant No.:

savarida