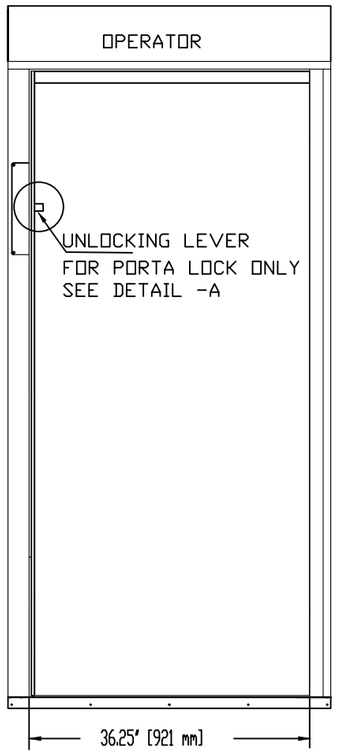

HOISTWAY VIEW

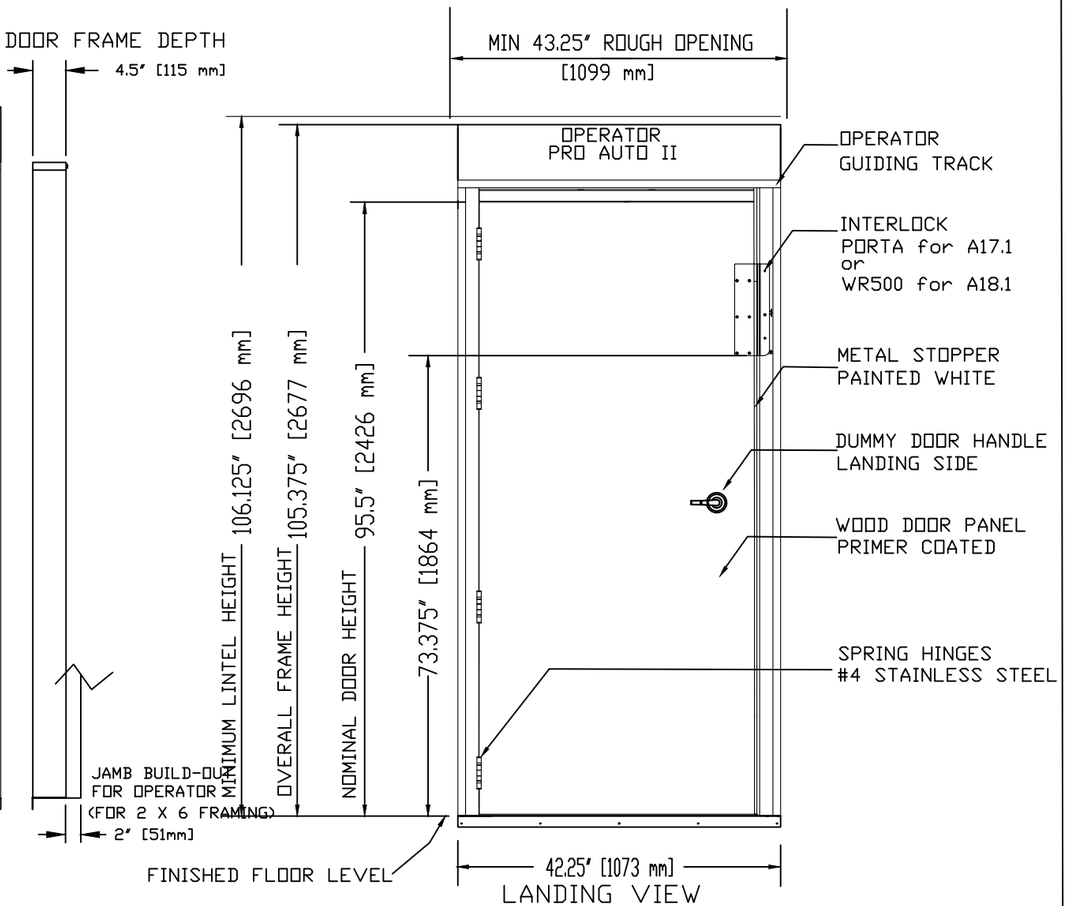

LANDING VIEW

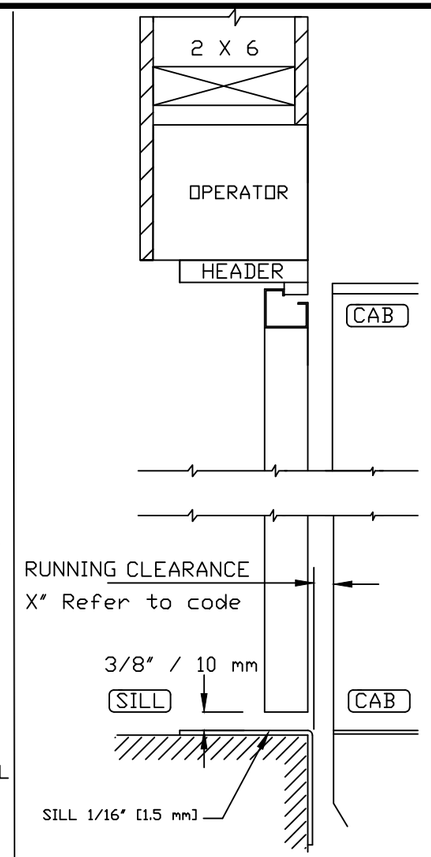

VERTICAL SECTION

PROVISION BY OTHERS ALL DOORS

- DRYWALL OR PARGING AROUND DOOR
- FRAMES AROUND DOOR SHALL BE WOOD CONSTRUCTION WITH ALL EDGES AND JOINTS SANDED TO A SMOOTH,
- FINAL PAINT
- FINISH MOLDING AROUND DOOR FRAME
- SEE DATASHEET OF THE INSTALLATION DRAWING FOR LANDING ENTRANCE SCHEDULE.

ADD. PROVISION FOR DOOR SLAB BY OTHERS

- DOOR SHALL BE SOLID-CORE, SWINGING TYPE
- 1.75 THICK, 36" x 96" DOOR SLAB
- DUMMY DOOR HANDLE
- SEE BELOW FOR CUT OUT LIST FOR DOOR BY OTHERS

NOTE: ALL INFORMATIONS IS SUBJECT TO CHANGE.

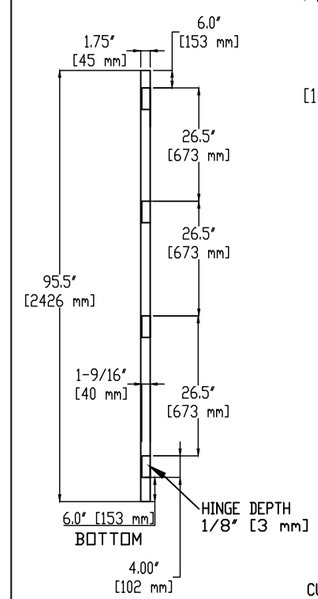

DOOR SLAB HINGE PATTERN

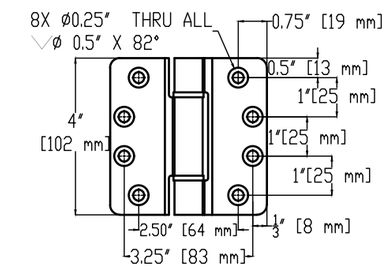

HINGE DETAIL

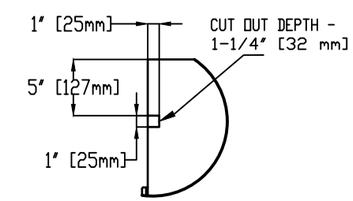

DETAIL - A

CUT OUT LIST IN PROVISION BY OTHERS :-
1- HINGE CUT OUT
2- EMERGENCY LEVER CUT OUT FOR PORTA-LOCK

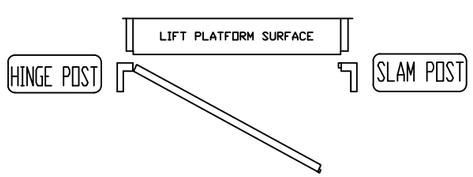

RIGHT HAND SWING



DOOR ATTACHEMENT HARDWARE
(5X) #8 X 3 FH SCREWS

DOOR PANEL TYPE

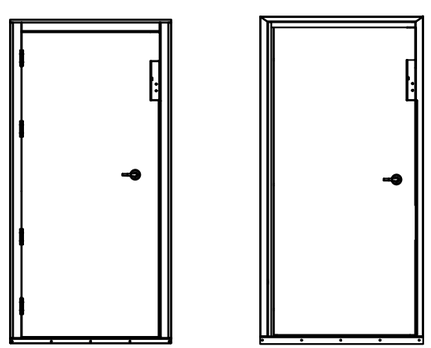

DOOR BY OTHERS FLAT

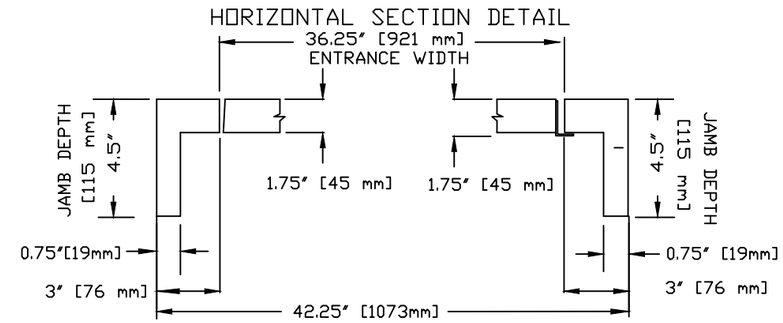

HORIZONTAL SECTION DETAIL

36x96" AUTO WOODEN RH DOOR

CUSTOMER:	DATE: MM/DD/YY
PROJECT:	REVISION DATE: MM/DD/YY
ADDRESS:	COMPLETED BY: PS

Part No.

Variant No.

savaria™

JOB No. JOB NUMBER

SHEET No. 1 OF 1