
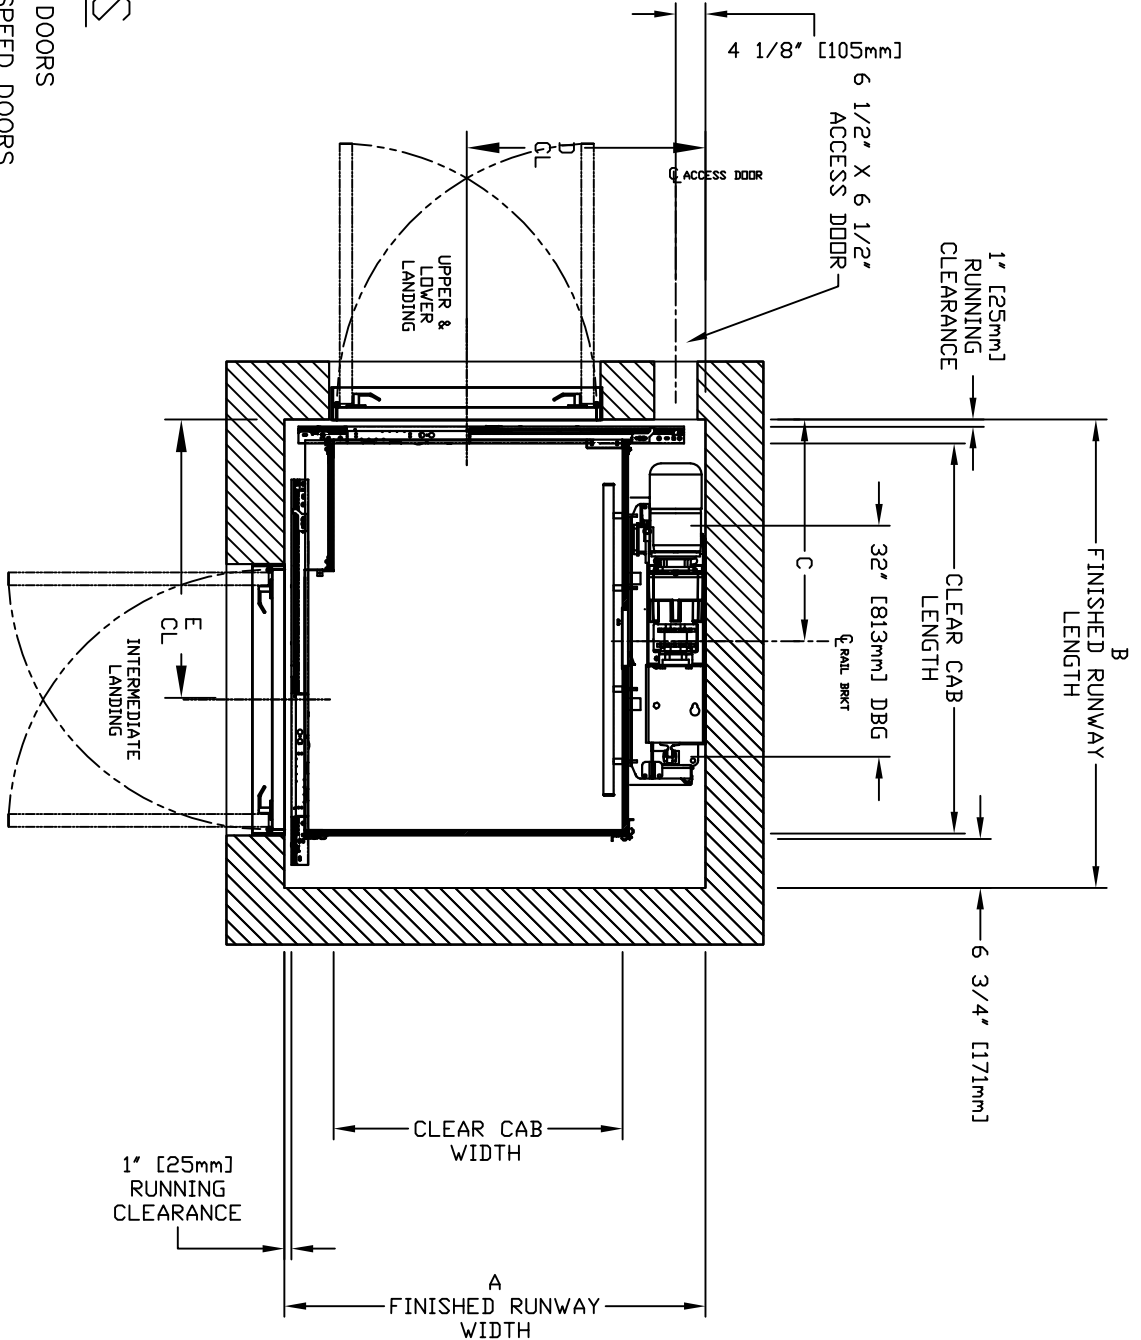
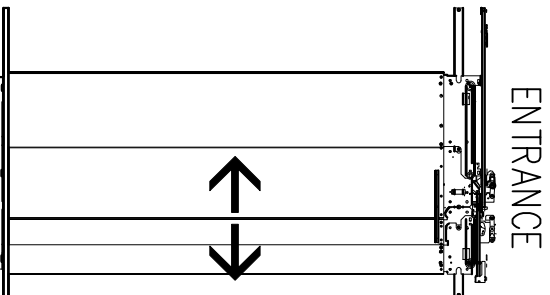


ECLIPSE AUTO SLIM DOORS W Swing Door Model TYPE 4

6 1/2" X 6 1/2" ACCESS DOOR

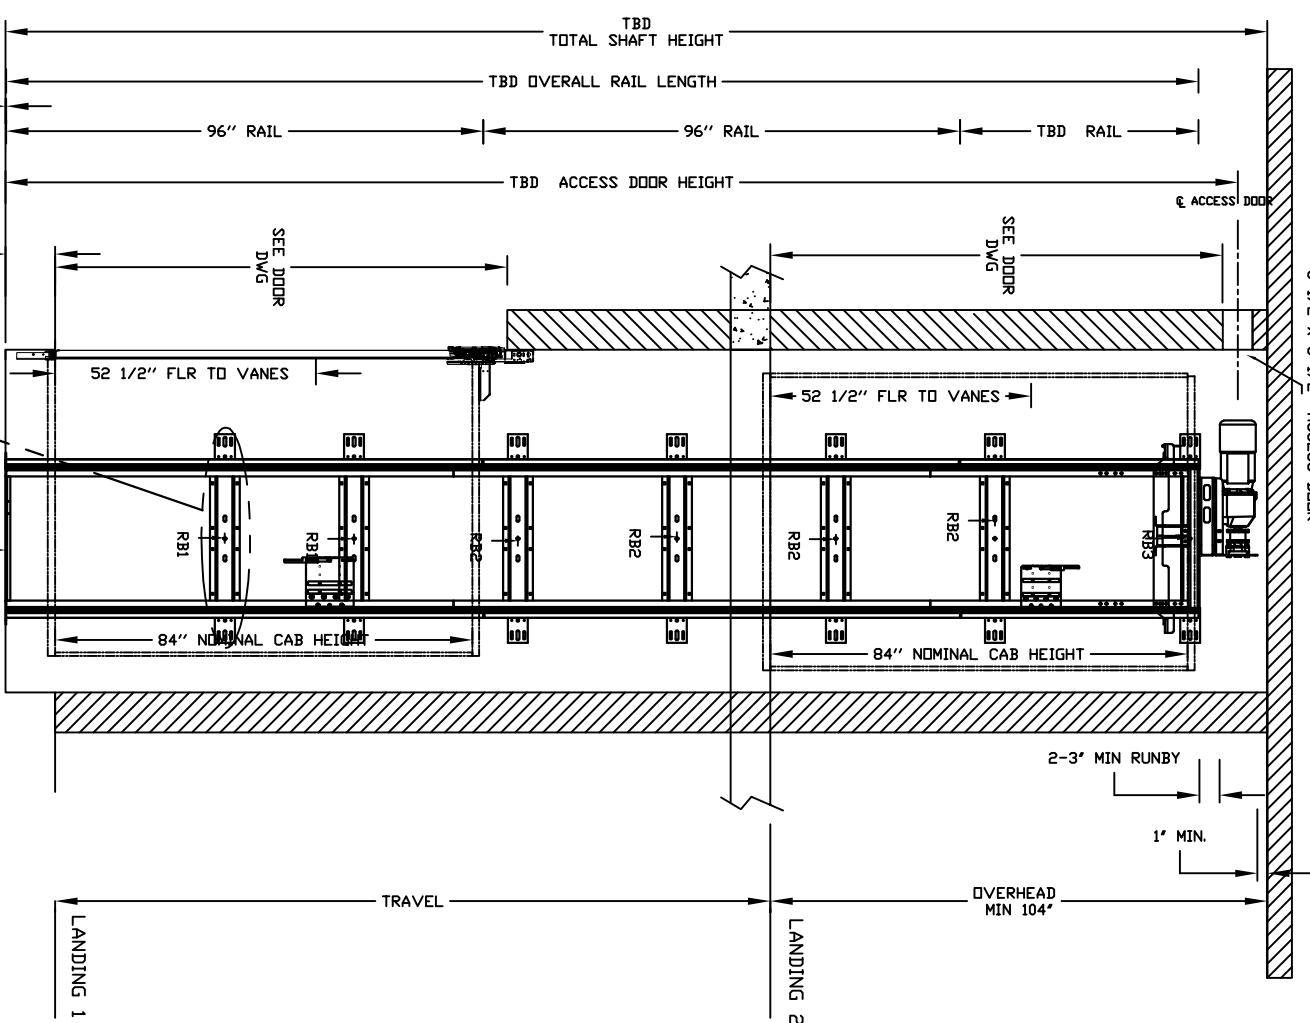

CHARACTERISTICS

- CAB DOOR TYPE: AUTO SLIM 2 SPEED DOORS
- ENTRANCE DOOR TYPE: AUTO SLIM 2 SPEED DOORS
- 2 SPEED DOORS FINISH: PAINT OR STAINLESS STEEL
- FULLY AUTOMATIC OPERATION TO OPEN THE DOORS UPON ARRIVAL AT THE LANDING LIGHTWEIGHT ALUMINUM SILL
- EMERGENCY BACK-UP BATTERY SYSTEM
- INFRARED DETECTION SYSTEM TO RETRACT DOORS BEFORE HITTING AN OBSTRUCTION

CANNOT HAVE HABITABLE SPACE BELOW PIT


RAIL BRACKET	BELOW THE MOTOR CONCORD REPRESENTATIVE FOR EXACT LOCATION	RAIL FORCES
FINAL RAIL BRACKET RB3	32" [813mm] INTERVALS AFTER 2nd BOTTOM BRACKET	*R1
INTERMEDIATE RAIL BRACKET RB2	39" [991mm]	*R2
BOTTOM RAIL BRACKET RB1	71" [1804mm] ABOVE PIT FLOOR	RAIL WEIGHT: 245 kg / m / ft
		PIT FORCE: R3
		PIT FLOOR TO SUPPORT LOAD (INCLUDES IMPACT) 2909 kg [6400 lbs]

CLEAR INSIDE CAB WIDTH	CLEAR INSIDE CAB LENGTH	A		B		C		D		E	
		FINISHED RUNWAY WIDTH	FINISHED RUNWAY LENGTH	FINISHED RUNWAY WIDTH	FINISHED RUNWAY LENGTH	RAIL CENTER LINE	DOOR CENTER LINE	DOOR CENTER LINE	DOOR CENTER LINE		
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches
914	1372	54	1499	59	1645	64 3/4	768	30 1/4	845	33 1/4	984
914	1524	60	1499	59	1797	70 3/4	845	33 1/4	845	33 1/4	1137
1016	1372	40	1524	60	1645	64 3/4	768	30 1/4	870	34 1/4	984

DOCUMENT REVISION 002, DATE: 09/04/18

RESIDENTIAL ELEVATOR ECLIPSE SLIMS DOORS W Swing Door TYPE 4

ALL INFORMATION IS SUBJECT TO CHANGE. PLEASE REFERENCE OUR ON-LINE DRAWINGS AT WWW.SAVARIA.COM FOR THE MOST RECENT UPDATES

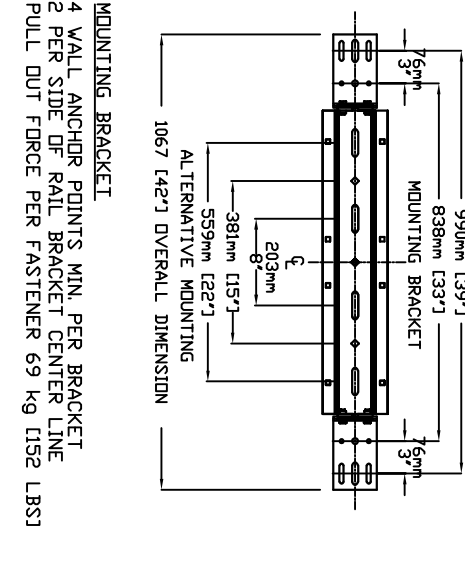

MOUNTING BRACKET
4 WALL ANCHOR POINTS MIN. PER BRACKET
2 PER SIDE OF RAIL BRACKET CENTER LINE
PULL OUT FORCE PER FASTENER 69 kg [152 LBS]